
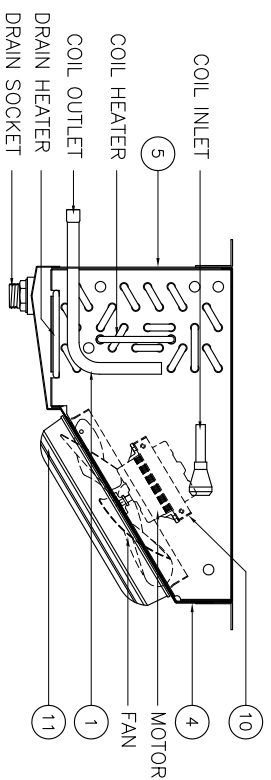


REV.	DESCRIPTION	DATE	DRAWN	CHECKED	APPRO.
△					
△					
△					

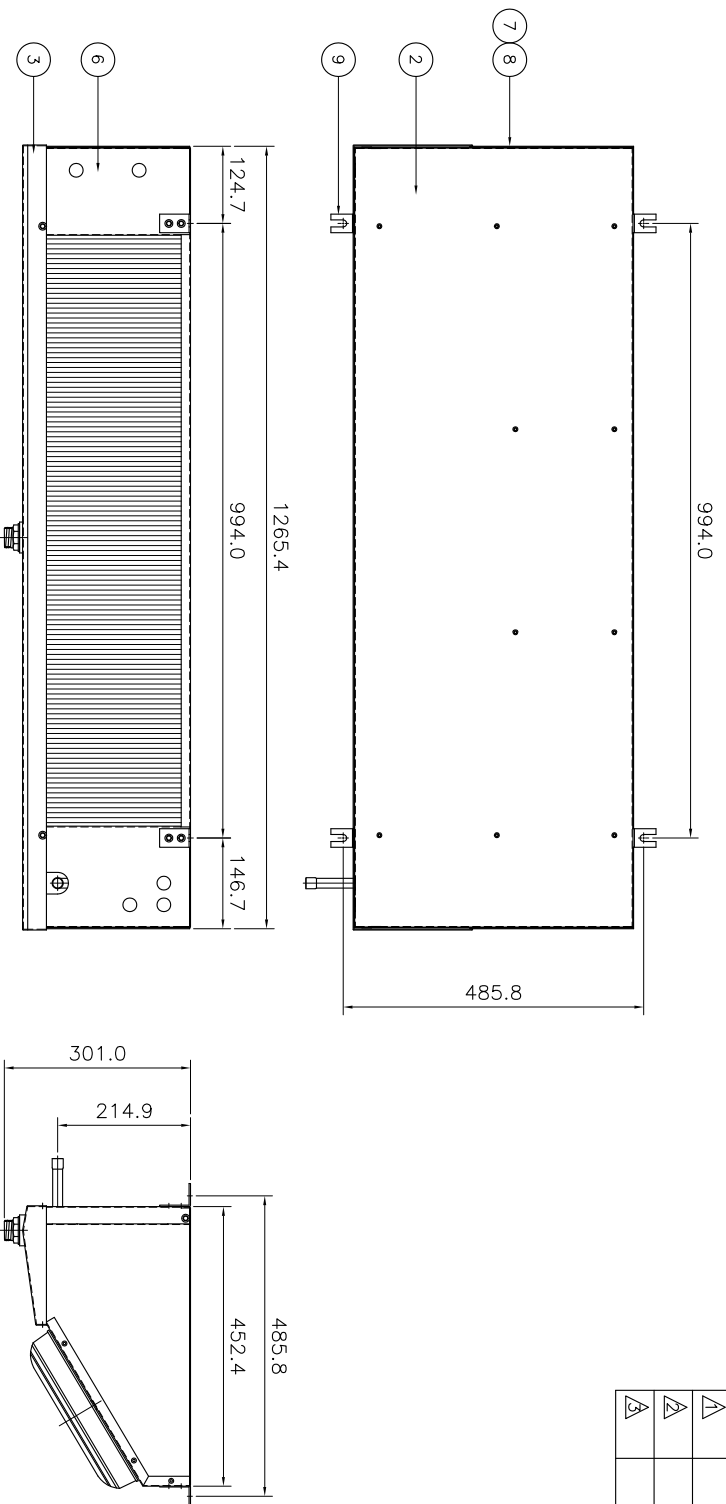

- NOTE**
1. Coating color : WHITE
 2. FAN & MOTOR wiring must be done according to circuit.
 3. COOLING CAPACITY : 1730W (Air inlet Temp. -17°C, Evap Temp -25°C)
 4. AIR VOLUME : 1727 CMH
 5. After commissioning the product, make sure to ship it.

SPECIFICATION

MODEL	COIL SPEC.	PIPE PITCH	FIN SPACING	FAN	MOTOR	DEFROST HEATER		INLET	INLET	DRAIN
						COIL	DRAIN			
TSS030L	3/8" SR 7S 960EL	R=27.5 S=31.75	8.0	φ250 x 3EA	1Ph 220V 19W 4P 50Hz x 3EA	0.99kW x	1.16kW x	φ12.7	φ15.88	25A

NO.	N A M E	MTR'L	S	P	E	C	Q'TY	REMARK
11	FAN COVER	PPU150					3	
10	MOTOR BRACKET	SGCC		1.6	T		1	
9	ANCHOR BRACKET	SGCC		2.3	T		4	
8	SIDE COVER-U	AL		1.0	T		1	
7	SIDE COVER-H	AL		1.0	T		1	
6	U-BEND COVER	AL		1.0	T		1	
5	HEADER COVER	AL		1.0	T		1	
4	FRONT PANEL	AL		1.0	T		1	
3	DRAIN PANEL	AL		1.0	T		1	
2	TOP PANEL	AL		1.0	T		1	
1	COIL ASS'Y						1	

PROJECT T S S 0 3 0 L

DRAWING of. UNIT COOLER ASSY

DWG.No

SCALE	DESIGNED	DRAWN BY	CHECKED	APPROVED
	LEE MIN HWAN			
D A T E	2016. 12. 17			



KYUNG DONG INDUSTRIAL CO., LTD