
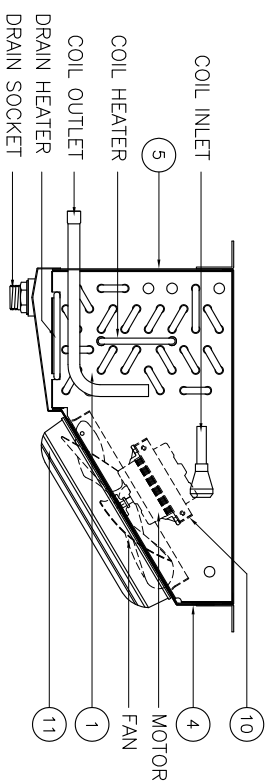


REV.	DESCRIPTION	DATE	DRAWN	CHECKED	APPRO.
△					
△					
△					

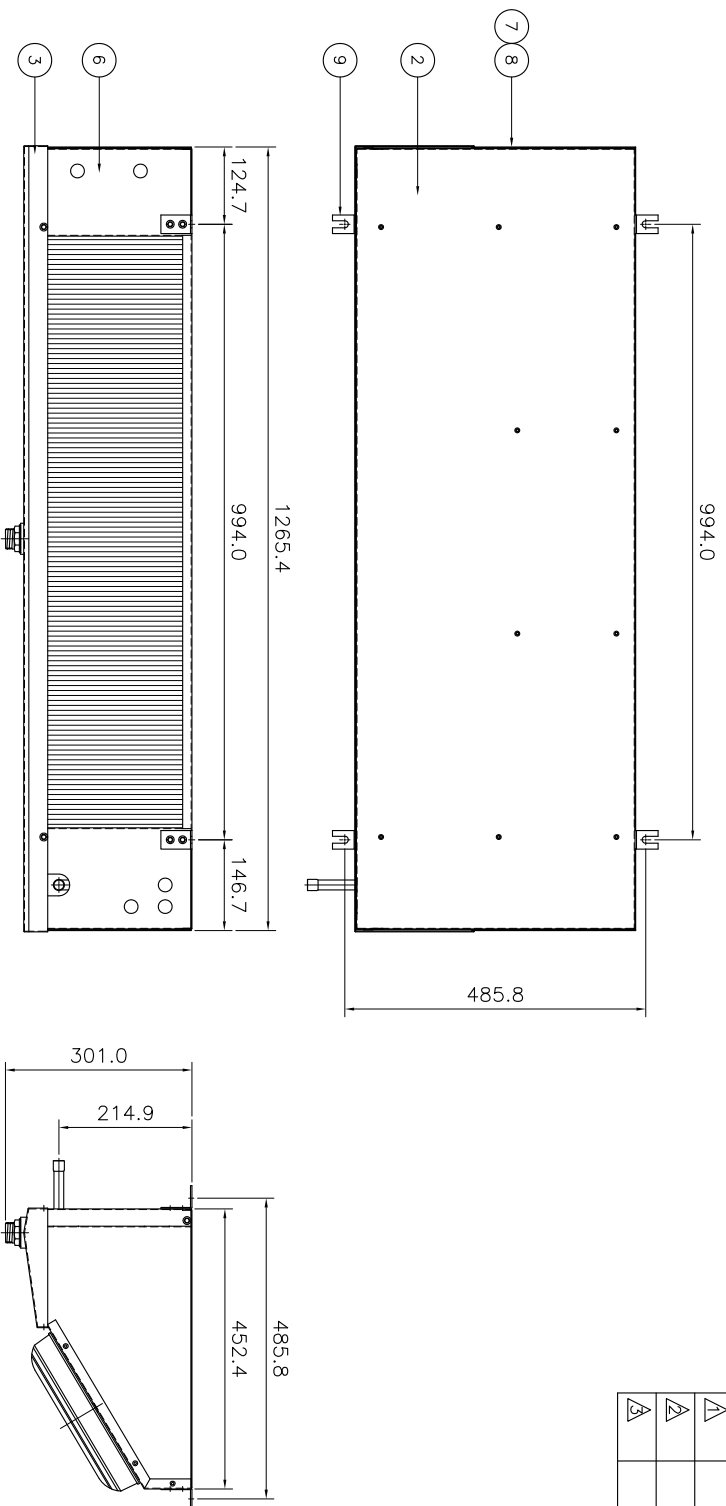

- NOTE**
1. Coating color : WHITE
 2. FAN & MOTOR wiring must be done according to circuit.
 3. COOLING CAPACITY : 2180W (Air inlet Temp. -17°C, Evap Temp -25°C)
 4. AIR VOLUME : 1589 CMH
 5. After commissioning the product, make sure to ship it.

SPECIFICATION

MODEL	COIL SPEC.	PIPE PITCH	FIN SPACING	FAN	MOTOR	DEFROST HEATER		INLET	INLET	DRAIN
						COIL	DRAIN			
TSS040L	3/8" 6R 7S 960EL	R=27.5 S=31.75	8.0	φ250 x 3EA	1Ph 220V 19W 4P 50Hz x 3EA	0.99kW x	1.16kW x	φ12.7	φ19.05	25A

NO.	N A M E	MTR'L	S	P	E	C	Q'TY	REMARK
11	FAN COVER	PPJ150	For φ250				3	
10	MOTOR BRACKET	SGCC	1.6 T				1	
9	ANCHOR BRACKET	SGCC	2.3 T				4	
8	SIDE COVER-U	AL	1.0 T				1	
7	SIDE COVER-H	AL	1.0 T				1	
6	U-BEND COVER	AL	1.0 T				1	
5	HEADER COVER	AL	1.0 T				1	
4	FRONT PANEL	AL	1.0 T				1	
3	DRAIN PANEL	AL	1.0 T				1	
2	TOP PANEL	AL	1.0 T				1	
1	COIL ASSY						1	

PROJECT T S S 0 4 0 L

DRAWING of. UNIT COOLER ASSY

DWG.No

SCALE	DESIGNED	DRAWN BY	CHECKED	APPROVED
	LEE MIN HWAN			
D A T E	2016. 12. 17			



KYUNG DONG INDUSTRIAL CO. LTD