
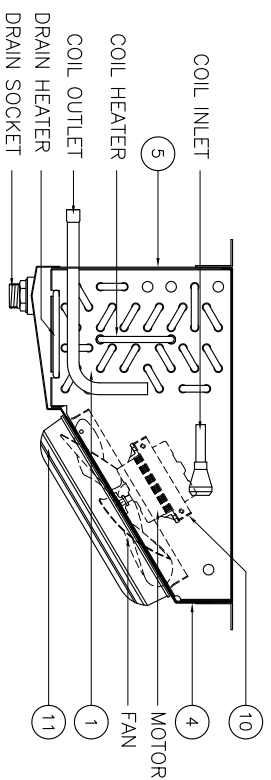


REV.	DESCRIPTION	DATE	DRAWN	CHECKED	APPRO.
△					
△					
△					

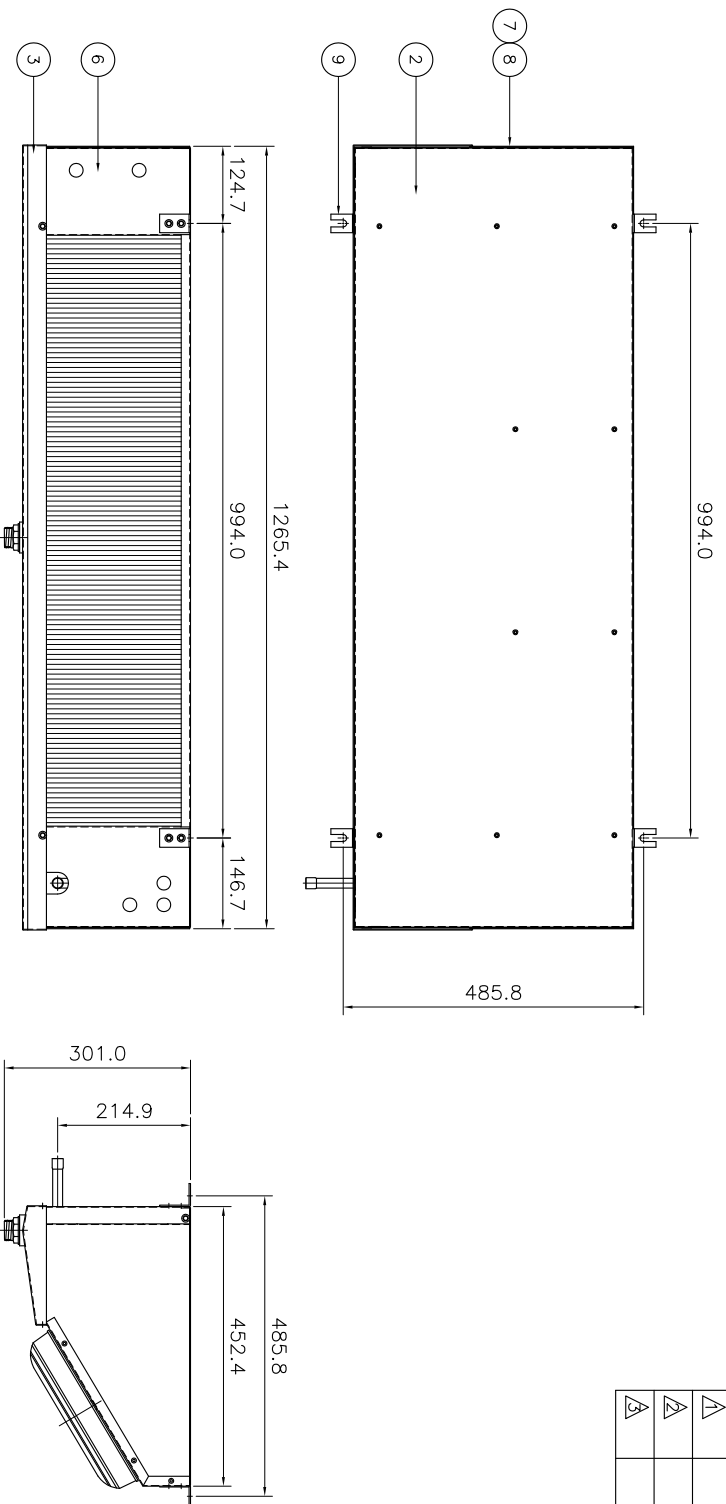

- NOTE**
1. Coating color : WHITE
 2. FAN & MOTOR wiring must be done according to circuit.
 3. COOLING CAPACITY : 3581W (Air inlet Temp. 0°C, Evap Temp -8°C)
 4. AIR VOLUME : 1644 CMH
 5. After commissioning the product, make sure to ship it.

SPECIFICATION

MODEL	COIL SPEC.	PIPE PITCH	FIN SPACING	FAN	MOTOR	DEFROST HEATER		INLET	INLET	DRAIN
						COIL	DRAIN			
TSS040M	3/8" 6R 7S 960EL	R=27.5 S=31.75	6.0	φ250 x 3EA	1Ph 220V 19W 4P 50Hz x 3EA	0.99kW x 1EA	1.16kW x 1EA	φ12.7	φ19.05	25A

11	FAN COVER	PPU150	For φ250	3	
10	MOTOR BRACKET	SGCC	1.6 T	1	
9	ANCHOR BRACKET	SGCC	2.3 T	4	
8	SIDE COVER-U	AL	1.0 T	1	
7	SIDE COVER-H	AL	1.0 T	1	
6	U-BEND COVER	AL	1.0 T	1	
5	HEADER COVER	AL	1.0 T	1	
4	FRONT PANEL	AL	1.0 T	1	
3	DRAIN PANEL	AL	1.0 T	1	
2	TOP PANEL	AL	1.0 T	1	
1	COIL ASS'Y			1	

PROJECT T S S 0 4 0 M

DRAWING of. UNIT COOLER ASSY DWG.No

SCALE	DESIGNED	DRAWN BY	CHECKED	APPROVED
	LEE MIN HWAN			
DATE	2016. 12. 17			



KYUNG DONG INDUSTRIAL CO., LTD