
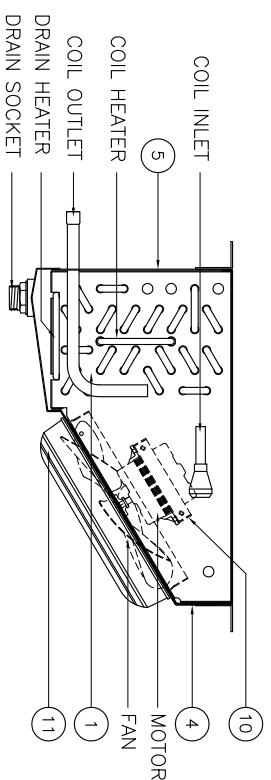
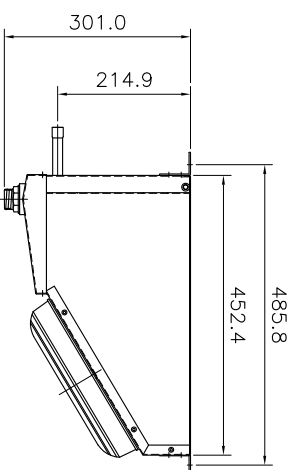
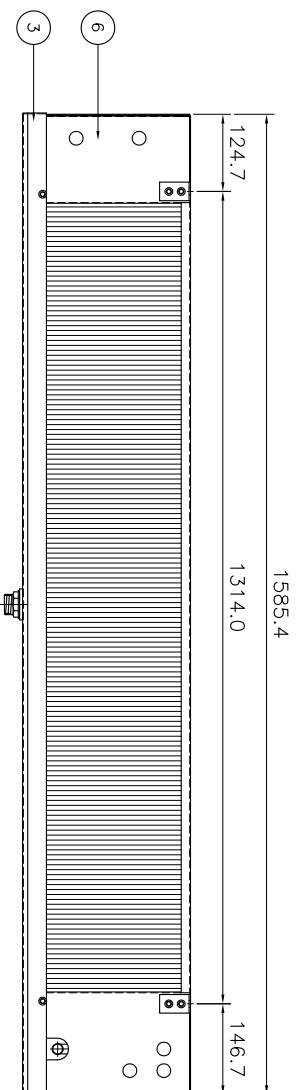


REV.	DESCRIPTION	DATE	DRAWN	CHECKED	APPRO.
△					
△					
△					

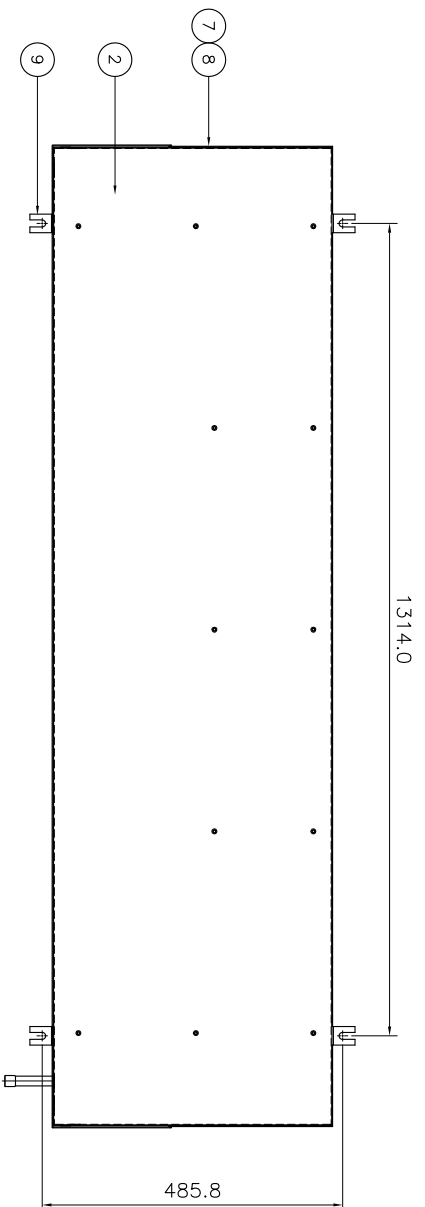

- NOTE**
1. Coating color : WHITE
 2. FAN & MOTOR wiring must be done according to circuit.
 3. COOLING CAPACITY : 3001W (Air inlet Temp. -17°C, Evap Temp -25°C)
 4. AIR VOLUME : 2118 CMH
 5. After commissioning the product, make sure to ship it.

SPECIFICATION

MODEL	COIL SPEC.	PIPE PITCH	FIN SPACING	FAN	MOTOR	DEFROST HEATER		INLET	INLET	DRAIN
						COIL	DRAIN			
TSS050L	3/8" 6R 7S 1280EL	R=27.5 S=31.75	8.0	φ250 x 4EA	1Ph 220V 19W 4P 50Hz x 4EA	1.29kW x	1.45kW x	φ12.7	φ22.22	25A

11	FAN COVER	PPU150	For φ250	4	
10	MOTOR BRACKET	SGCC	1.6 T	1	
9	ANCHOR BRACKET	SGCC	2.3 T	4	
8	SIDE COVER-U	AL	1.0 T	1	
7	SIDE COVER-H	AL	1.0 T	1	
6	U-BEND COVER	AL	1.0 T	1	
5	HEADER COVER	AL	1.0 T	1	
4	FRONT PANEL	AL	1.0 T	1	
3	DRAIN PANEL	AL	1.0 T	1	
2	TOP PANEL	AL	1.0 T	1	
1	COIL ASS'Y			1	

PROJECT T S S 0 5 0 L

DRAWING of.	UNIT COOLER ASSY	DWG.No
SCALE	Reg.Q'TY	REV.No
DESIGNED	DRAWN BY	CHECKED
N A M E	LEE MIN HWAN	APPROVED
D A T E	2016. 12. 17	



KYUNG DONG INDUSTRIAL CO., LTD